

# SCHOTT Solar polycrystalline double-glazed module

SCHOTT POLY™ 280/290/300

The long-established German company SCHOTT Solar is a world leader in the photovoltaic industry and has more than 50 years of experience in the development and production of components for solar applications.

SCHOTT Solar polycrystalline modules are specifically designed for both roof- and ground-mounted applications. Due to strict internal quality standards, all modules benefit from exceptionally long durability, which results in maximised profitability. The polycrystalline cells within each module are sorted to particularly narrow performance tolerances, thereby allowing series interconnections with minimal mismatch losses.

**Long life through double glazing:** The exceptionally long life is ensured by the use of double glazing.

**Double of the required standard:** SCHOTT Solar tests its modules for twice as long as is required by the IEC.

**High resistance to mechanical loads:** The solid anodised aluminium frame ensures superior torsional resistance. SCHOTT Solar polycrystalline modules are also tested to an extreme loading pressure of 5,400 Pa – which equates to 550 kg per square metre and a reassuring level of security for your investment.

**High performance output:** All SCHOTT Solar polycrystalline modules hold a positive tolerance of their nominal power rating. This ensures a stable high-energy output and a quick return on investment.


**Long-term reliability:** SCHOTT Solar offers a power output guarantee of 30 years and a product warranty of five years.

**Increased resistance to reverse current:** SCHOTT Solar polycrystalline modules have a high resistance to reverse current, minimising the wiring costs.

- Long life through double glazing
- Double of the required standard
- High resistance to mechanical loads
- High performance output
- Long-term reliability
- Increased resistance to reverse current



SCHOTT POLY™ 280/290/300

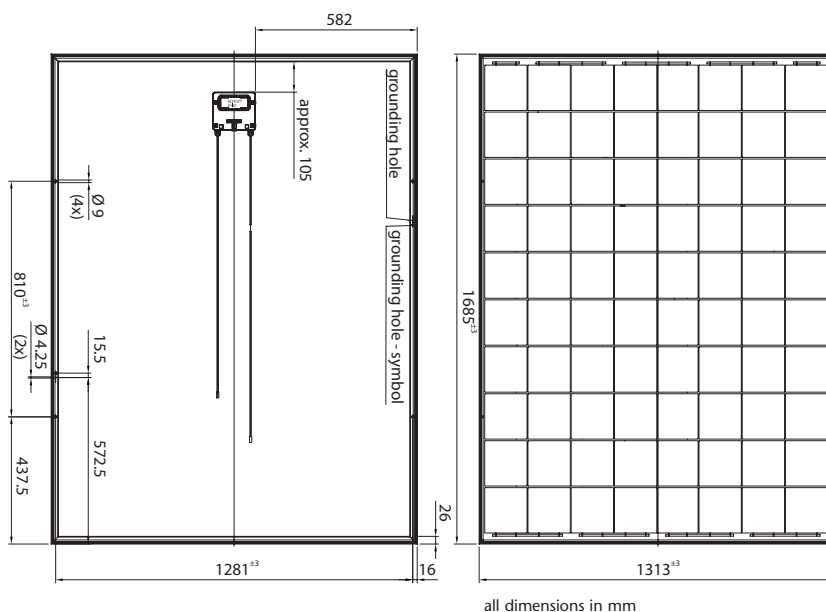

**SCHOTT**  
solar

## Technical Data\*

### Electrical data

Electrical data refer to Standard Test Conditions (STC):  
Irradiance 1000 W/m<sup>2</sup>, spectrum Air Mass 1.5 and cell temperature 25°C



| Module type                  |                  | SCHOTT POLY™ 280 | SCHOTT POLY™ 290 | SCHOTT POLY™ 300 |
|------------------------------|------------------|------------------|------------------|------------------|
| Nominal power [Wp]           | P <sub>mpp</sub> | ≥ 280            | ≥ 290            | ≥ 300            |
| Sorting tolerance            |                  | -0 %             | -0 %             | -0 %             |
| Voltage at nominal power [V] | U <sub>mpp</sub> | 39.1             | 39.5             | 39.7             |
| Current at nominal power [A] | I <sub>mpp</sub> | 7.16             | 7.33             | 7.55             |
| Open-circuit voltage [V]     | U <sub>oc</sub>  | 48.1             | 48.5             | 48.9             |
| Short-circuit current [A]    | I <sub>sc</sub>  | 7.95             | 8.10             | 8.24             |
| Module efficiency level (%)  | η                | 12.7             | 13.1             | 13.6             |

Sorting of module performance by flash data report (-0 %, positive tolerance only)  
Rating tolerance for power output is ± 4 % and rating tolerance for all other parameters is ± 10 %.

### Data at normal operating cell temperature (NOCT)

Irradiance 800 W/m<sup>2</sup>, spectrum Air Mass 1.5, windspeed 1 m/s and ambient temperature 20°C



| Nominal power [Wp]           | P <sub>mpp</sub>  | 206  | 213  | 221  |
|------------------------------|-------------------|------|------|------|
| Voltage at nominal power [V] | U <sub>mpp</sub>  | 35.8 | 36.1 | 36.3 |
| Open-circuit voltage [V]     | U <sub>oc</sub>   | 44.0 | 44.4 | 44.7 |
| Short-circuit current [A]    | I <sub>sc</sub>   | 6.40 | 6.52 | 6.64 |
| Temperature [°C]             | T <sub>NOCT</sub> | 48.0 | 48.0 | 48.0 |

Rating tolerance for power output is ± 4 % and rating tolerance for all other parameters is ± 10 %.

### Temperature coefficients



|                              |                                  |       |       |       |
|------------------------------|----------------------------------|-------|-------|-------|
| Power [%/K]                  | T <sub>K</sub> (P <sub>n</sub> ) | -0.47 | -0.47 | -0.47 |
| Open-circuit voltage [mV/K]  | T <sub>K</sub> (U)               | -1.61 | -1.62 | -1.63 |
| Short-circuit current [mA/K] | T <sub>K</sub> (I)               | 2.39  | 2.43  | 2.47  |

### Characteristic data



|                        |   |
|------------------------|---|
| Solar cells per module | 80  |
| Cell type              | MAIN-Iso (polycrystalline silicon, 156 x 156 mm <sup>2</sup> , full-square)   |
| Connection             | Junction box IP65 with 4 bypass diodes, 4 mm <sup>2</sup> -solar cable with Tyco-Connectors, length of pole: (-) 0.9 m, (+) 2.1 m |
| Dimensions             |   |
| junction box [mm]      | 150 x 150 x 25  |
| Front panel            | low iron solar glass 3.2 mm   |
| Frame material         | anodised aluminium  |

### Dimensions and weight



|                 |                                  |
|-----------------|----------------------------------|
| Dimensions [mm] | 1,685 x 1,313 (tolerance ± 3 mm) |
| Thickness [mm]  | 50 (tolerance ± 1 mm)            |
| Weight [kg]     | approx. 41.5                     |

### Limits



|  |   |
|--|---|
| System voltage [V <sub>DC</sub> ]            | 1000  |
| Maximum reverse current I <sub>R</sub> [A]** | 20  |
| Operating module temperature [°C]            | -40... +85  |
| Maximum load (to IEC 61215 ed. 2)            | Pressure: 5,400 N/m <sup>2</sup> or 550 kg/m <sup>2</sup> |
| Application classification (to IEC 61730)    | A   |
| Fire classification (to IEC 61730)           | C   |

### Permission and certificates



The module SCHOTT POLY™ 280/290/300 complies with the requirements of IEC 61215 ed. 2 and IEC 61730, Electrical Protection Class II and the CE-guidelines.

The **installation manual** contains additional information on installation and operation.

All information complies with the requirements of the standard EN 50380.

\* Temporary data sheet

\*\* No external voltage in excess of U<sub>oc</sub> shall be applied to the module.



MANAGEMENTSYSTEM  
Certified by DQS according to  
DIN EN ISO 9001:2000 · Reg.-No. 2184  
DIN EN ISO 14001:2005 · Reg.-No. 2184

SCHOTT Solar AG  
Carl-Zeiss-Strasse 4  
63755 Alzenau  
Germany

Phone: +49 (0) 60 23 / 91 - 1712  
Fax: +49 (0) 60 23 / 91 - 1700  
solar.sales@schottsolar.com  
www.schottsolar.com

**SCHOTT**  
solar